

# F lat Panel Square



SKY

Order No.	Power	Lumen	Beam Angle(°)	SIZE(mm)
<b>NSPS3624</b>	24	1800	120	300 x 600 x15
<b>NSPS6640</b>	40	4400	120	600 x 600 x15
<b>NSPS6655</b>	55	5500	120	600 x 600 x15
<b>NSPS3148</b>	48	4560	120	300 x 1200 x15

Protection Class  
★ Class I


Color Temperature(°K)  
🔥 Warm-Natural-Cool

Body Coating  
🔥 Electrostatic Powder Coating

Body Material  
⚙️ Extruded Aluminum




IP42 | 80 CR | CE



- Slim profile bezel for discreet installation
- Ideal for shallow ceiling void
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- LED SMD light source

★ کاربری:

مناسب جهت هتل ها و مراکز تجاری، ساختمان های اداری و آموزشی و درمانی

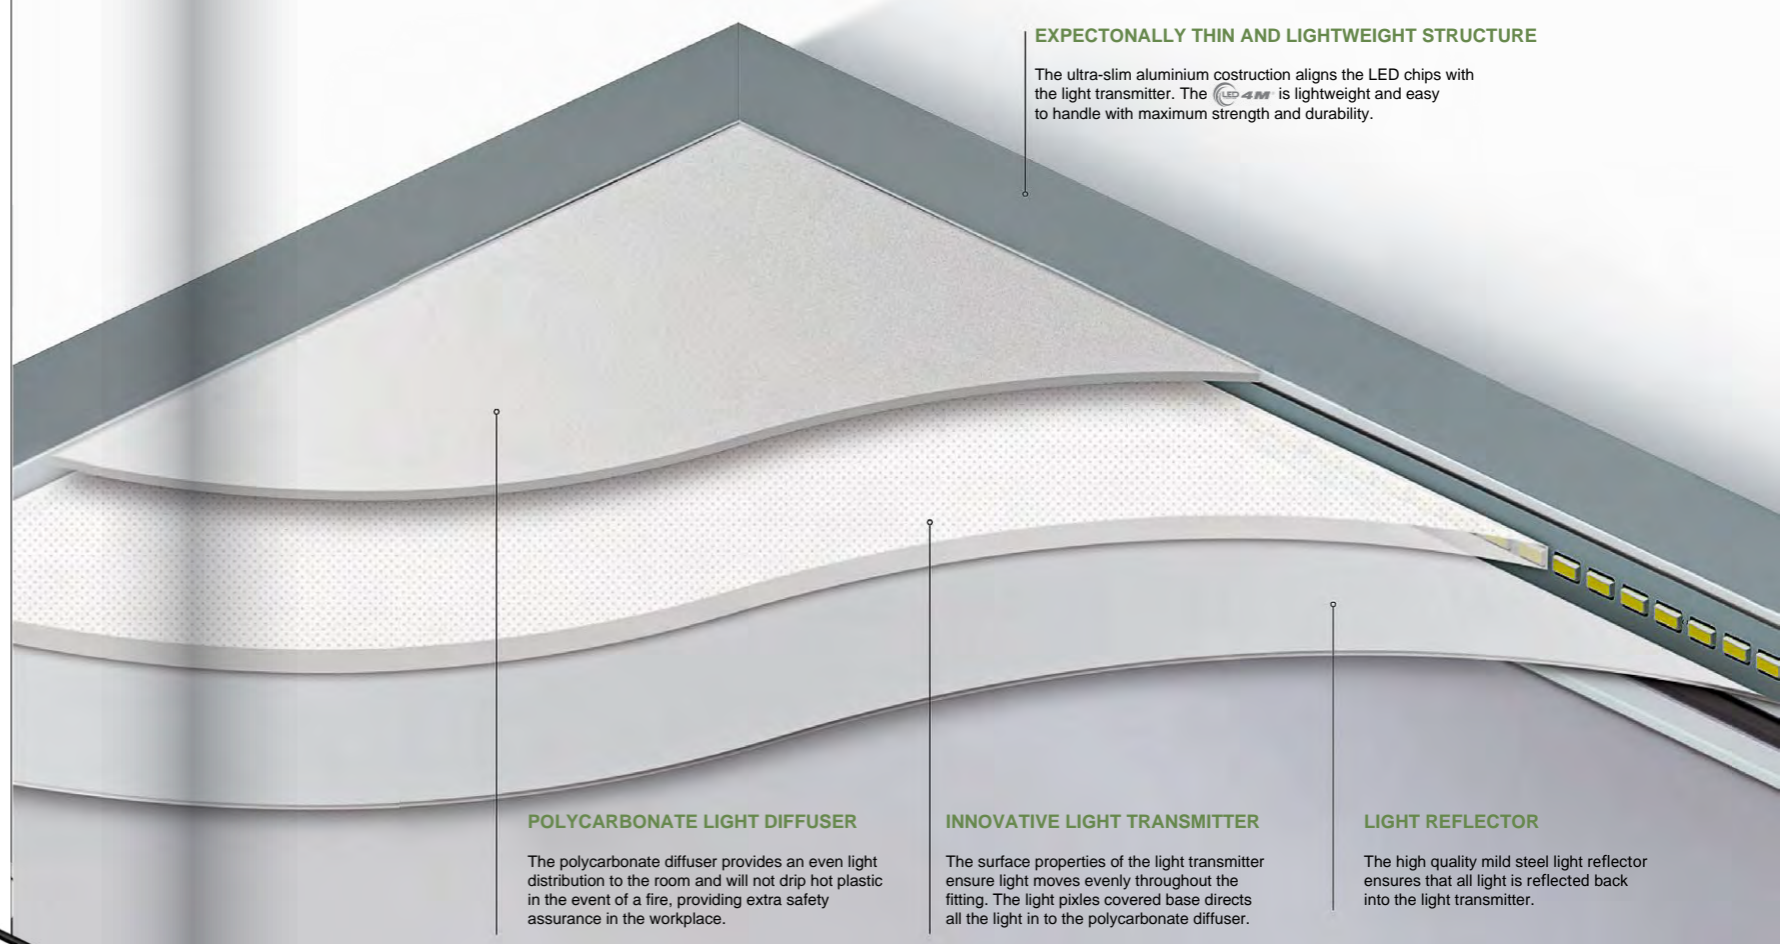

**EXPECTONALLY THIN AND LIGHTWEIGHT STRUCTURE**

The ultra-slim aluminium construction aligns the LED chips with the light transmitter. The **LED 4M** is lightweight and easy to handle with maximum strength and durability.

**POLYCARBONATE LIGHT DIFFUSER**

The polycarbonate diffuser provides an even light distribution to the room and will not drip hot plastic in the event of a fire, providing extra safety assurance in the workplace.

**INNOVATIVE LIGHT TRANSMITTER**

The surface properties of the light transmitter ensure light moves evenly throughout the fitting. The light pixels covered base directs all the light in to the polycarbonate diffuser.

**LIGHT REFLECTOR**

The high quality mild steel light reflector ensures that all light is reflected back into the light transmitter.


**Smooth, even light sidtribution**

Distributes light evenly over entrie surface, preventing hotspots or shadowing



LED 4M

POOR QUALITY LED PANELS




**HIGH QUALITY CONSTRUCTION**  
The construction of NOORA prevents light seeping through joins in the fitting

MICRO

# MICRO Square LED Light Panel




IP42 | 85 CRI | CE



- Slim profile bezel for discreet installation
- Ideal for shallow ceiling void
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- LED SMD light source

★ کاربری:

مناسب جهت هتل ها و مراکز تجاری، ساختمان های اداری و آموزشی و درمانی



	Order No.	Power	Lumen	Beam Angle(°)	SIZE(mm)
MICRO	NSPM6640	40	3600	120	595 x 35
Protection Class	Class I	Color Temperature(°K)	Natural	Body Coating	Electrostatic Powder Coating
				Body Material	Extruded Aluminum

A F R A




ALMAS

	Order No.	Power	Lumen	Beam Angle(°)	SIZE(mm)
ALMAS	NSPA3640	40	3800	120	300 x 600 x 12
	NSPA6660	60	5700	120	600 x 600 x 12
	NSPA3160	60	5700	120	1200 x 300 x 12


Protection Class ★ Class I	Color Temperature(°K) Warm-Natural-Cool	Body Coating Electrostatic Powder Coating	Body Material Extruded Aluminum
-------------------------------	--	--	------------------------------------

	Order No.	Power	Lumen	Beam Angle(°)	SIZE(mm)
A F R A	NSPA3624	24	2160	120	300 x 600 x 80
	NSPA6650	50	4500	120	620 x 620 x 80
	NSPA3150	50	4500	120	300 x 1200 x 80

Protection Class ★ Class I	Color Temperature(°K) Natural	Body Coating Electrostatic Powder Coating	Body Material Extruded Aluminum
-------------------------------	----------------------------------	--	------------------------------------

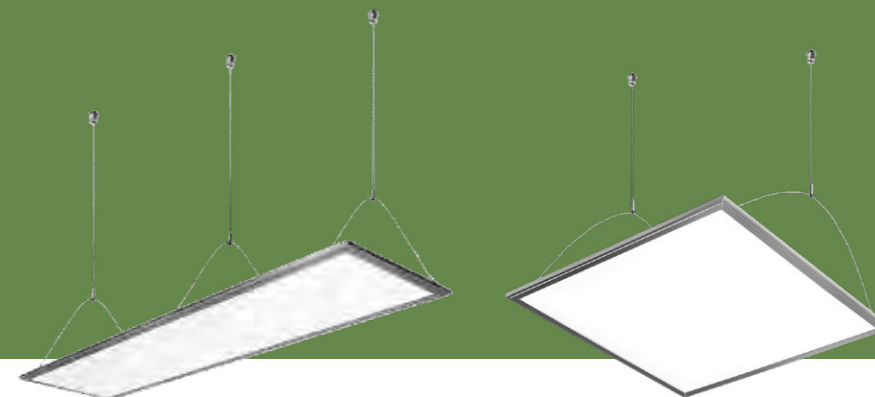


IP42 | 80 CRI | CE




- Slim profile bezel for discreet installation
- Ideal for shallow ceiling void
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- LED SMD light source

★ کاربری:

مناسب جهت هتل ها و مراکز تجاری، ساختمان های اداری و آموزشی و درمانی



IP42 | 80 CRI | CE



- Slim profile bezel for discreet installation
- Ideal for shallow ceiling void
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- LED SMD light source

★ کاربری:


مناسب جهت هتل ها و مراکز تجاری، ساختمان های اداری و آموزشی و درمانی



LUXIA



IP42 | 80 CRI | CE



- Slim profile bezel for discreet installation
- Ideal for shallow ceiling void
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- LED SMD light source

★ کاربری:

مناسب جهت هتل ها و مراکز تجاری، ساختمان های اداری و آموزشی و درمانی

Order No. Power Lumen Beam Angle(°) Dimension(mm) Cut Size(mm)

Order No.	Power	Lumen	Beam Angle(°)	Dimension(mm)	Cut Size(mm)
<b>NSPL8008</b>	8	640	120	90 x 90 x 25	∅ 80
<b>NSPL1315</b>	15	1200	120	145 x 145 x 25	∅ 130
<b>NSPL1520</b>	20	1600	120	170 x 170 x 25	∅ 155
<b>NSPL1924</b>	24	1920	120	220 x 220 x 30	∅ 195

Protection Class  
★ Class I

Color Temperature(°K)  
Warm-Cool


Body Coating  
Electrostatic Powder Coating

Body Material  
Die Cast Aluminum

ARN O



IP42 | 75 W | 75 CRI | CE



- Slim profile bezel for discreet installation
- Ideal for shallow ceiling void
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- LED SMD light source

★ کاربری:

مناسب جهت هتل ها و مراکز تجاری، ساختمان های اداری و آموزشی و درمانی

Order No. Power Lumen Beam Angle(°) Dimension(mm) Cut Size(mm)

Order No.	Power	Lumen	Beam Angle(°)	Dimension(mm)	Cut Size(mm)
<b>NSPA7703</b>	3	225	120	85 x 85 x 25	70 x 70
<b>NSPA1106</b>	6	450	120	120 x 120 x 25	110 x 110
<b>NSPA1309</b>	9	630	120	145 x 145 x 25	130 x 130
<b>NSPA1512</b>	12	840	120	168 x 168 x 25	155 x 155
<b>NSPA1818</b>	18	1530	120	200 x 200 x 25	180 x 180
<b>NSPA2724</b>	24	2040	120	290 x 290 x 25	275 x 275
<b>NSPA3836</b>	36	3060	120	400 x 400 x 40	380 x 380

Protection Class  
★ Class I

Color Temperature(\*K)  
Warm-Cool-Natural

Body Coating  
Electrostatic Powder Coating

Body Material  
Die Cast Aluminum