

# Outdoor LED Light






CASCADE



IP65 | 75 CRI | ADJUSTABLE



- Ingress protection against dust and moisture
- High thermal resistance
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- Specially designed cooling feature

★ کاربری:

نورپردازی فضای آزاد، سالن های ورزشی، سوله های کارخانه ها و نمای ساختمان ها

	Order No.	Power (W)	Lumen	Beam Angle(°)	SIZE(mm)
OMEGA	NFLC1415	15	1050	120	140 x 125 x 35
	NFLC1830	30	2100	120	180 x 160 x 35
	NFLC2560	60	4200	120	250 x 230 x 45
	NFLC3510	100	7000	120	350 x 240 x 45
	NFLC5520	200	14000	120	550 x 380 x 60
	NFLC6050	500	35000	120	600 x 380 x 60


Protection Class: ★ Class I | Color Temperature(°K): Warm-Cool | Body Coating: Electrostatic Powder Coating | Body Material: Die Cast Aluminum



LANDA




Color Variety

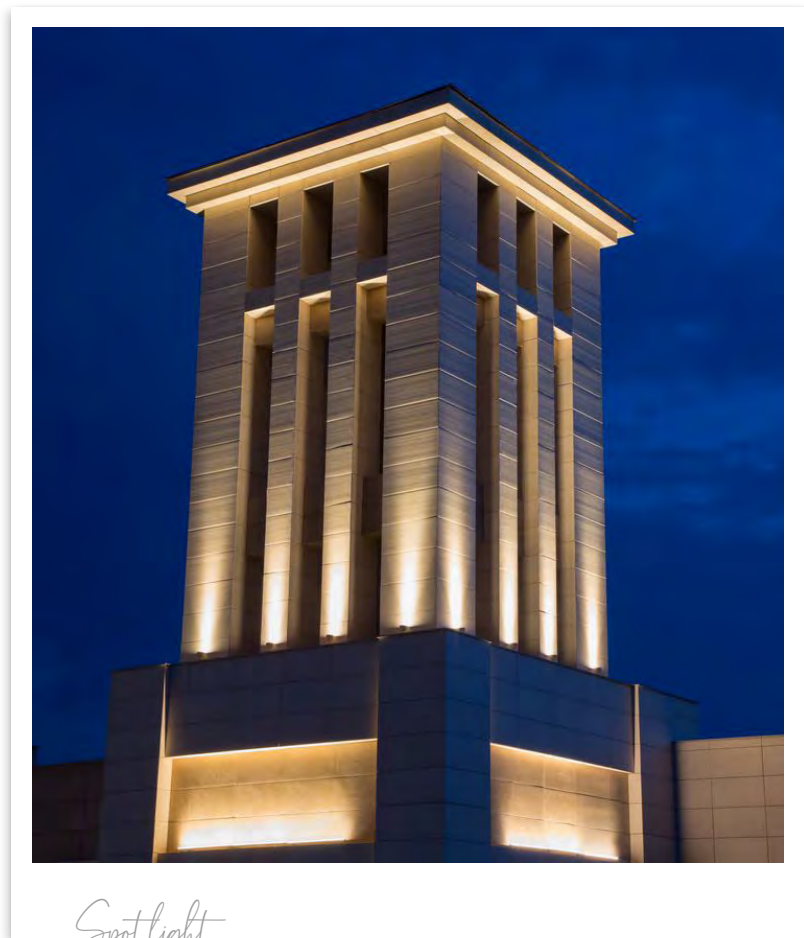

Spotlight

IP65 | 75 CRI | Adjustable



- Rotatable light source in different angle
- Clear Acrylic Lenz
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- LED COB light source

کاربری:

نورپردازی فضای آزاد و فضای سبز و نمای ساختمان

Order No.	Power	Lumen	Beam Angle(°)	SIZE(mm)
LANDA NJSL1310	10	850	5	138 x 70 x 120

Protection Class	Color Temperature(°K)	Body Coating	Body Material
★ Class I	Warm-Cool-Natural-RGB	Electrostatic Powder Coating	Die Cast Aluminum

DELTA

IP65 | 75 CRI | Adjustable

- Rotatable light source in different angle
- Clear Acrylic Lenz
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- LED COB light source

کاربری:

نورپردازی فضای آزاد و فضای سبز و نمای ساختمان



Order No.	Power	Lumen	Beam Angle(°)	SIZE(mm)
DELTA NSID3405	5	450	45	43 x 60 x 145

Protection Class	Color Temperature(°K)	Body Coating	Body Material
★ Class I	Warm-Cool	Electrostatic Powder Coating	Die Cast Aluminum





NOVA




	Order No.	Power	Lumen	Beam Angle(°)	SIZE(mm)
NOVA	NWLN2512	12	960	5	250 x 65 x 95
	NWLN4021	21	1680	5	400 x 65 x 95
	NWLN1054	54	4320	5	1000 x 65 x 95

Protection Class  
★ Class II

Color Temperature(°K)  
Warm-Cool

Body Coating  
Electrostatic Powder Coating

Body Material  
Die Cast Aluminum



IP67 | 85 CRI | ↓ | ← | CE | ADJUSTABLE

- Screen printing tempered glass
- Super Brightness (130 lm/w)
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- Good heat dissipation







SUBTRAN



1W

3W

6W

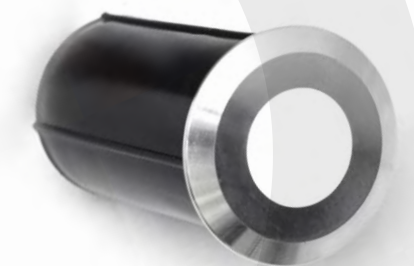

IP65 | 80 CRI | CE | IK08

- Ingress protection against dust and moisture
- High thermal resistance
- 2 year warranty
- LED Module Life Time (h) 50000 Hrs
- Specially designed cooling feature

★ کاربری:  
نورپردازی فضای آزاد و فضای سبز

	Order No.	Power (W)	Lumen	Beam Angle(°)	SIZE(mm)
SUBTRAN	NILS4301	1	100	45	Ø43 x H70
	NILS6503	3	300	45	Ø65 x H80
	NILS1003	3	245	30	Ø100 x H75
	NILS8006	6	600	30	Ø80 x H90

Protection Class  
★ Class I

Color Temperature(°K)  
🔥 Warm-Cool

Body Coating  
🛡️ Electrostatic Powder Coating

Body Material  
⚙️ Die Cast Aluminum





When choosing inground luminaires, there is a crucial aspects you need to consider. The fittings have to be solidly manufactured with good seals and joints. These luminaires operate under rougher conditions than most.